

| APPLICATION FOR OSHPD PREAPPROVAL | OFFICE USE ONLY | | | | | | |
|--|--|--|--|--|--|--|--|
| | | | | | | | |
| OF MANUFACTURER'S CERTIFICATION (OPM) | APPLICATION #: OPM-0178-13 | | | | | | |
| | | | | | | | |
| OSHPD Preapproval of Manufacturer's Certification (OPM) | | | | | | | |
| Type: ☐ New ☐ Renewal ☐ Update to Pre-CBC 2013 OPA Number: | | | | | | | |
| Manufacturer Information | | | | | | | |
| | | | | | | | |
| Manufacturer: Beckman Coulter | | | | | | | |
| Manufacturer's Technical Representative: Hendra Tanumihardja | | | | | | | |
| | | | | | | | |
| Mailing Address: 250 S. Kramer Blvd., Brea, CA. 92821-6232 | | | | | | | |
| Telephone: (800) 526-3821 Email: <u>Dhtanu</u> | mihardja@beckman.com | | | | | | |
| Product Information | Opp | | | | | | |
| Troduct information | | | | | | | |
| Product Name: PE Centrifuge | \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\ | | | | | | |
| Product Type: Other Mechanical or Electrical Component 8 – 13 | 置 | | | | | | |
| H H | | | | | | | |
| Product Model Number: PC20 PY: William Staeh | lin H | | | | | | |
| General Description: Centrifugation Module for Power Express Diagno | ostics Lab Automation System | | | | | | |
| Q DATE: 01/20/2015 | 3 | | | | | | |
| | 00 | | | | | | |
| Annihous Information | | | | | | | |
| Applicant Information | \$\tag{\partial}{\partial}\tag{\partial}{\partial}\tag{\partial} | | | | | | |
| Applicant Company Name: EASE Co. | COL | | | | | | |
| 201FDING | | | | | | | |
| Contact Person: Jonathan Roberson, S.E. | | | | | | | |
| Mailing Address:5877 Pine Ave. Suite 210, Chino Hills, CA. 91709 | | | | | | | |
| Telephone: (909) 606-7622 Email: J.Rob | erson@EASECo.com | | | | | | |
| I hereby agree to reimburse the Office of Statewide Health Planning and Development review fees in | | | | | | | |
| accordance with the California Administrative Code, 2013. | | | | | | | |
| \ _ | | | | | | | |
| Signature of Applicant: | Date: 12/17/14 | | | | | | |
| Title: Principal Engineer Company Name: EASE | | | | | | | |
| | | | | | | | |

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"

STATE OF CALIFORNIA - HEALTH AND HUMAN SERVICES AGENCY OSH-FD-700 (REV 1/24/13)

OFFICE USE ONLY



OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT FACILITIES DEVELOPMENT DIVISION

| Registered Design Professional Preparing Engineering Recommendations | | | | | | | |
|--|--|--|--|--|--|--|--|
| Company Name: EASE Co. | | | | | | | |
| Name: Jonathan Roberson, S.E. California License Number: S4197 | | | | | | | |
| Mailing Address: 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709 | | | | | | | |
| Telephone: 909-606-7667 Email: J.Roberson@EASECo.com | | | | | | | |
| OSHPD Special Seismic Certification Preapproval (OSP) | | | | | | | |
| □ Special Seismic Certification is preapproved under OSP- (Separate application for OSP is required) □ Special Seismic Certification is not preapproved | | | | | | | |
| Certification Method(s) | | | | | | | |
| ☐ Testing in accordance with: ☐ ICC-ES AC156 ☐ FM 1950-10 ☐ Other* (Please Specify): ☐ | | | | | | | |
| *Use of test criteria other than those adopted by the California Building Standards Code, 2013 (CBSC 2013) for component supports and attachments are not permitted. For distribution system, interior partition wall, and suspended ceiling seismic bracings, test criteria other than those adopted in the CBSC 2013 may be used when approved by OSHPD prior to testing. Analysis Experience Data DATE: 01/20/2015 Combination of Testing, Analysis, and/or Experience Data (Please Specify): List of Attachments Supporting the Manufacturer's Certification Test Report Drawings Calculations Manufacturer's Catalog Other(s) (Please Specify): | | | | | | | |
| OFFICE USE ONLY – OSHPD APPROVAL VALID FOR CBC 2013 ONLY | | | | | | | |
| Signature: | | | | | | | |

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"

₩/**//////**

os

STATE OF CALIFORNIA – HEALTH AND HUMAN SERVICES AGENCY OSH-FD-700 (REV 1/24/13)

Page 2 of 2



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

5877 Pine Ave, Ste. 210 Chino Hills, CA. 91709 Phn: (909) 606-7622

Office of Statewide Health Planning and Development

PREAPPROVAL OF MANUFACTURER'S CERTIFICATION OPM-0178-13

THIS PREAPPROVAL CONFORMS TO THE 2013 CALIFORNIA BUILDING CODE

MANUFACTURER: BECKMAN COULTER

PE CENTRIFUGE

Sheet: 1 of 8 Date: 1/6/15


GENERAL NOTES

EQUIPMENT NAME:

- 1. THIS OSHPD PREAPPROVAL OF MANUFACTURER'S CERTIFICATION (OPM) IS BASED ON THE 2013 CBC. THE DEMANDS (DESIGN FORCES) FOR USE WITH THIS OPM SHALL BE BASED ON THE 2013 CBC
- 2. THIS DOCUMENT MAY ONLY BE USED WITH THE EXPRESS WRITTEN CONSENT OF THE MANUFACTURER LISTED ABOVE FOR THE SPECIFIC PROJECT SITE AND INSTALLATION LOCATION. THIS DOCUMENT IS INVALID WITHOUT SUCH CONSENT.
- 3. THIS PREAPPROVAL CONFORMS TO THE 2013 CALIFORNIA BUILDING CODE WHERE SDS IS NOT GREATER THAN 2.20. SEE DETAIL FOR APPLICABILITY
- 4. FORCES PER ASCE 7-10 SECTION 13.3.1, EQUATIONS 13.3-1, 13.3-2 & 13.3-3, WHERE SDS = 2.20, a_p = 1.0, I_p = 1.5, R_p = 1.5, Z/h = 0 AT CONCRETE SLAB & Z/h < 1 AT CONCRETE SLAB ON METAL DECK. SEE FOLLOWING SHEETS FOR Ω_0
- 5. THIS PREAPPROVAL COVERS ONLY THE SUPPORTS AND ATTACHMENTS OF THE EQUIPMENT TO THE STRUCTURE.
- 6. ALL DESIGN FORCES SHOWN ON THE DRAWINGS ARE FACTORED LOADS THAT SHALL BE USED FOR STRENGTH DESIGN.
- 7. CONCRETE SLAB ON METAL DECK DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION IN THE BUILDING. (i.e. z/h < 1)
- 8. CONCRETE SLAB ON GRADE DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION BELOW GRADE. (i.e. z/h < 0)

9. RESPONSIBILITIES OF THE STRUCTURAL ENGINEER OF RECORD OF THE BUILDING

- A. PROVIDE SUPPORTING STRUCTURE TO SUPPORT WEIGHTS AND FORCES SHOWN IN ADDITION TO ALL OTHER LOADS.
- B. VERIFY THAT THE INSTALLATION IS IN CONFORMANCE WITH THE 2013 CBC AND WITH THE DETAILS, MATERIAL AND GAGE OF THE UNIT WHERE ATTACHMENTS ARE MADE AGREE WITH THE INFORMATION SHOWN ON THE PREAPPROVAL DOCUMENTS.
- C. VERIFY THAT PROJECT SPECIFIC VALUES OF SDS & z/h RESULT IN SEISMIC FORCES (Eh, Ev) THAT DO NOT EXCEED THE VALUES ON THE DETAILS.
- D. VERIFY THAT THE CONCRETE SLAB TO WHICH THE EQUIPMENT IS ANCHORED MEETS THE REQUIREMENTS OF THE APPLICABLE ICC ESR.
- E. VERIFY THAT THE ANCHORS ARE AN ADEQUATE DISTANCE FROM ANY SLAB EDGES OR OPENINGS (SEE TYPICAL DETAIL ON SHEET 2).
- F. VERIFY THAT ALL NEW OR EXISTING ANCHORS ARE AN ADEQUATE DISTANCE FROM THE UNIT ATTACHMENTS AND CHECK FOR INTERACTION WHERE OTHER ANCHORS ARE WITHIN 18" OR 6hef FROM THIS UNIT'S ANCHORS.



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

SHEETS

BECKMAN COULTER

PE CENTRIFUGE


| des. J. | | SHI | |
|----------------|---------|-----|---|
| JOB NO. | 11-1416 | | 4 |
| DATE | 1/6/15 | OF | 8 |


10. EXPANSION ANCHORS:

A. ATTACHMENT IS TO BE MADE WITH THE ANCHORS LISTED BELOW AND INSTALLED AS DESCRIBED IN THE CORRESPONDING ICC REPORT.

| Anchor Diameter | Concrete Type | Min. f'c (psi) | Anchor Type | ICC Report No. | Min. Embed. | Min. Spacing | Min. Edge Dist. | Min. Conc. Thickness | Torque Test | Direct Tension |
|--------------------|----------------------|-------------------|--------------------|-------------------|----------------|-----------------|--------------------|-------------------------|----------------|----------------|
| 3/8" | Sand Light Weight | 3000 | Hilti Kwik Bolt TZ | ESR-1917 | 2" | N/A | N/A | See Sheet 7 of 8 | 25 FT-LB | 1186 lb |
| 1/2" | Normal Weight | 3000 | Hilti Kwik Bolt TZ | ESR-1917 | 2" | 4" | 9" | 4" | 40 FT-LB | 1338 lb |

- B. THIS PREAPPROVAL ALLOWS FOR UP TO A MAXIMUM OF 2 ADJACENT CONCRETE SLAB EDGES, 9" AWAY MINIMUM (i.e. - CORNER). SEE ADJACENT DETAIL FOR ADDITIONAL MINIMUM ALLOWABLE CONCRETE EDGE DISTANCES.
- C. TESTING OF EXPANSION ANCHORS PER 2013 CBC, 1913A.7: TESTING SHALL BE DONE IN THE PRESENCE OF THE SPECIAL INSPECTOR AND A REPORT OF THE TEST RESULTS SHALL BE SUBMITTED TO OSHPD
 - (i) AFTER AT LEAST 24 HOURS HAVE ELAPSED SINCE INSTALLATION, DIRECT PULL TENSION TEST OR TORQUE TEST AT LEAST 50% OF THE ANCHORS.
 - (ii) ACCEPTANCE CRITERIA:
 - DIRECT TENSION TEST: THE ANCHOR SHOULD HAVE NO OBSERVABLE MOVEMENT AT THE TEST LOAD, A PRACTICAL WAY TO DETERMINE OBSERVABLE MOVEMENT IS THAT THE WASHER BECOMES LOOSE.
 - TORQUE TEST: THE APPLICABLE TORQUE MUST BE ACHIEVED WITHIN THE FOLLOWING LIMITS: WEDGE TYPE: 1/2 TURN OF THE NUT
 - TYPICAL CONCRETE EDGE DETAIL
 - (iii) IF ANY ANCHOR FAILS, TEST ALL ANCHORS.
- 11. BOLTS THROUGH CONCRETE ON METAL DECK
 - A. BOLTS SHALL BE TORQUED BY 3/4 TURN OF THE NUTS AFTER THE SNUG TIGHT (THE SNUG-TIGHT CONDITION IS DEFINED AS THE TIGHTNESS REQUIRED TO BRING THE CONNECTED PLIES INTO FIRM CONTACT) CONDITION IS ACHIEVED, UNLESS OTHERWISE NOTED.
 - B. THROUGH BOLT HOLES SHALL BE 1/16" LARGER THAN BOLT SIZE (HOLE SIZE = BOLT SIZE + 1/16) FOR CONCRETE.
 - C. THROUGH-BOLTS IN CONCRETE SHALL RECEIVE SPECIAL INSPECTION AND TESTING (THROUGH BOLTS WITH STEEL TO STEEL CONNECTION IN TENSION DO NOT REQUIRE TENSION TESTING) IN ACCORDANCE WITH REQUIREMENTS FOR POST-INSTALLED ANCHORS.





EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

BECKMAN COULTER

PE CENTRIFUGE

DES. J. ROBERSON


11-1416

DATE 1/6/15

JOB NO.

3

8 SHEETS

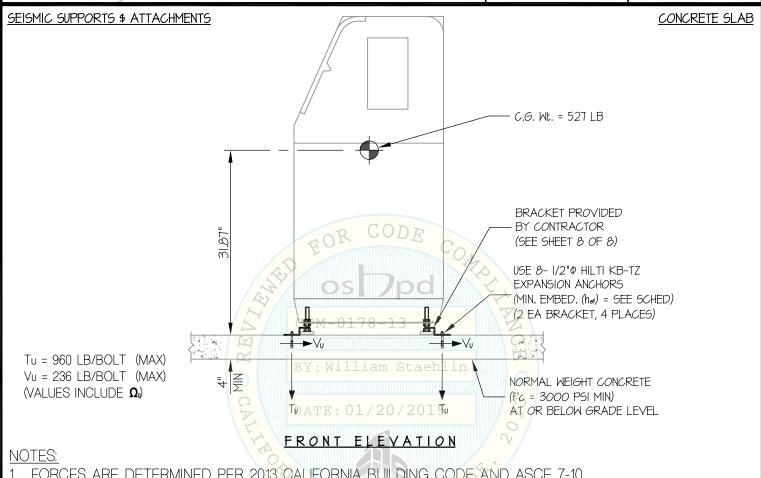

1. FORCES ARE DETERMINED PER 2013 CALIFORNIA BUILDING CODE AND ASCE 7-10 STRENGTH DESIGN IS USED. (SDS = 2.2, 2p = 1.0, 1p = 1.5, 2p = 1.5, 2p

HORIZONTAL FORCE (Eh) = 0.99 Wp HORIZONTAL FORCE (Emh) = 1.49 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (Ev) = 0.44 Wp

- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.
- 4. SEE GENERAL NOTES: SHEETS 1 AND 2

No. 4197 EXP. 6-30-2016

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

1/6/15

www.EquipmentAnchorage.com

OF

BECKMAN COULTER

PE CENTRIFUGE

DES. J. ROBERSON

ЈОВ NO. 11-1416


DATE


4

8 SHEETS

SEISMIC SUPPORTS \$ ATTACHMENTS

CONCRETE SLAB

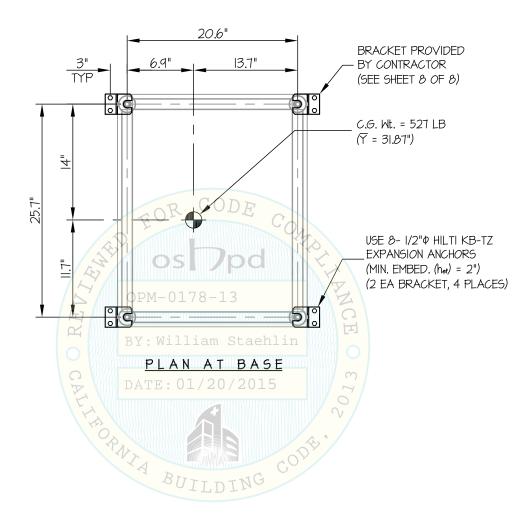



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

BECKMAN COULTER

PE CENTRIFUGE

DES. J. ROBERSON 11-1416 JOB NO.


DATE

1/6/15

SHEETS

SEISMIC SUPPORTS \$ ATTACHMENTS

CONCRETE SLAB ON METAL DECK

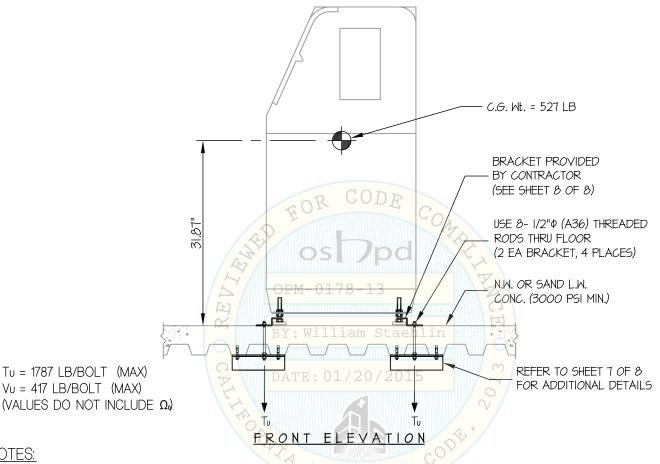

NOTES:

Tu = 1787 LB/BOLT (MAX)

Vu = 417 LB/BOLT (MAX)

1. FORCES ARE DETERMINED PER 2013 CALIFORNIA BUILDING CODE AND ASCE 7-10. STRENGTH DESIGN IS USED. (SDS = 2.2, Δp = 1.0, |p| = 1.5, Rp = 1.5, Ω_0 = 1.5, z/h < 1)

> HORIZONTAL FORCE (Eh) = 2.64 Wp HORIZONTAL FORCE (Emh) = 3.96 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (E_V) = 0.44 Wp

- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE. SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.
- 4. SEE GENERAL NOTES: SHEETS 1 AND 2



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

BECKMAN COULTER

PE CENTRIFUGE

JOB NO. 11-1416

DATE 1/6/15


6

SHEETS

SEISMIC SUPPORTS \$ ATTACHMENTS

CONCRETE SLAB ON METAL DECK

OF

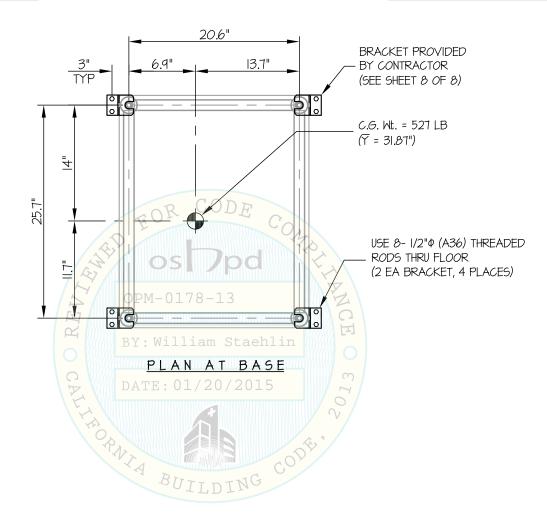



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

BECKMAN COULTER

PE CENTRIFUGE


DES. J. ROBERSON

ЈОВ NO. 11-1416

DATE 1/6/15

7

SHEETS

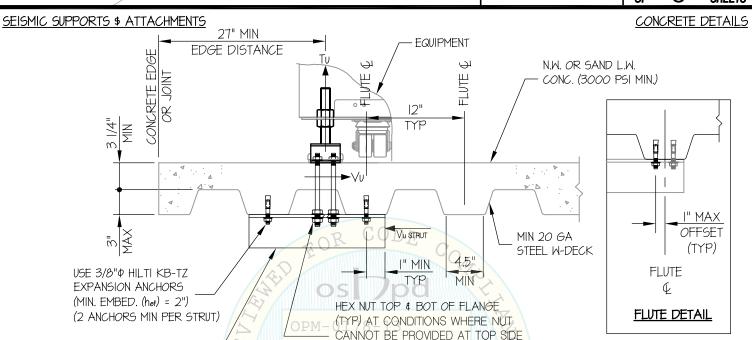

MIN STEEL DECK REQUIREMENTS AND STRUT DETAIL

OF STRUT, PROVIDE TAPPED HOLE

DATE: 01/20/2015

BY: WITHROUGH STRUT FLANGE.



L3 X 3 X I/4" X I'-5" MIN

(A36) AT EACH ANCHOR

BECKMAN COULTER DES. J. ROBERSON JOB NO. 11-1416 DATE 1/6/15 PE CENTRIFUGE DES. J. ROBERSON JOB NO. 11-1416 DATE 1/6/15

